


## Geberit electrofusion coupling

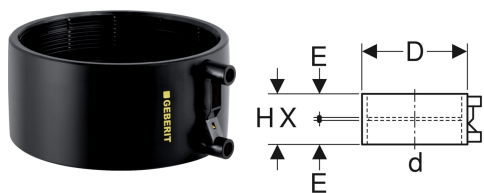

Example image

### Application purposes

- For building drainage
- For site drainage
- For high-tensile, permanent connection of pipes and fittings

### Characteristics

- Can be welded with Geberit electrofusion machines

- UV-resistant

### Technical data

Installation temperature	-10 – +40 °C
Product material	PE-HD

Art. no.	DN	d, ø	D	E	H	X
360.771.16.1	40	40 mm	5.2 cm	2.8 cm	6 cm	0.3 cm
361.771.16.1	50	50 mm	6.2 cm	2.8 cm	6 cm	0.3 cm
363.771.16.1	56	56 mm	6.8 cm	2.8 cm	6 cm	0.3 cm
364.771.16.1	60	63 mm	7.6 cm	2.8 cm	6 cm	0.3 cm
365.771.16.1	70	75 mm	8.9 cm	2.8 cm	6 cm	0.3 cm
366.771.16.1	90	90 mm	10.4 cm	2.8 cm	6 cm	0.3 cm
367.771.16.1	100	110 mm	12.5 cm	2.8 cm	6 cm	0.3 cm
368.771.16.1	125	125 mm	14.2 cm	2.8 cm	6 cm	0.3 cm
369.771.16.1	150	160 mm	17.8 cm	2.8 cm	6 cm	0.3 cm