

3001...



BRONZE HORIZONTAL VALVE
RUBBER SEAT

CHECK VALVES



- Horizontal valve rubber seat
- Thread: ISO 228 and request NPT
- Temperature range: -10°C to $+100^{\circ}\text{C}$ / min. $+14^{\circ}\text{F}$ to max. $+212^{\circ}\text{F}$

This valve is particularly indicated for the non-return of fluids that can cause dezincification problems. It is also suitable for use in marine and other aggressive environments. Other excellent fields of application are in plant engineering for plumbing and heating, industry and shipbuilding. The direction of flow is indicated by an arrow on the valve body. It must be installed horizontally. Seat seal is provided by a EPDM gasket.

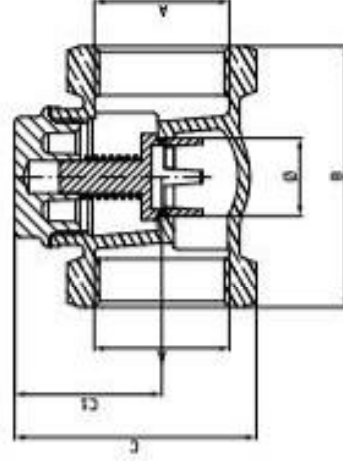

COMPONENTS:

POSH	PART NAME	No. Pcs.	MATERIAL
1	Body	1	Bronze CC491K UNI-EN 1982:2000
2	Cap	1	CW617N UNI-EN 12164 (3/8" and 3/4") CW617N UNI-EN 12165 (1" to 4")
3	Cap gasket	1	PTFE
4	Spring	1	AISI 302 stainless steel
5	O-ring	1	EPDM
6	Valve seal	1	CW617N UNI-EN 12164 (1/2" to 1.1/2") CW617N UNI-EN 12165 (2" to 4")

DIMENSIONS MM:

DN	A	B	C	C1	Ø	PN
10	3/8"	50	42	29	11	16
15	1/2"	50	45	30	11	16
20	3/4"	55	52	33	13	16
25	1"	64	59	36	19	16
32	1.1/4"	73	71	42	23	16
40	1.1/2"	83	80	48,5	29	16
50	2"	88	95	56,5	36	16
65	2.1/2"	150	128	80,5	62	16
80	3"	165	146	95	76	16

DIMENSIONS INCH:

	A	B	C	C1	Ø	PSI
3/8"	1,969	1,654	1,654	1,142	0,433	200
1/2"	1,969	1,772	1,772	1,181	0,433	200
3/4"	2,165	2,047	2,047	1,299	0,512	200
1"	2,520	2,323	2,323	1,417	0,748	200
1.1/4"	2,874	2,795	2,795	1,654	0,906	200
1.1/2"	3,268	3,740	3,740	1,909	1,142	200
2"	3,465	4,213	4,213	2,224	1,417	200
2.1/2"	5,906	5,039	5,039	3,150	2,441	200
3"	6,496	5,709	5,709	3,740	2,992	200

PACKAGING:

CODE	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"
PIECES PER BOX	20	20	15	10	8	-	-	-	-
PIECES PER CARTON	200	200	150	100	80	50	30	10	8
	3001010C00	3001010D00	3001010E00	3001010F00	3001010G00	3001010H00	3001010I00	3001010J00	3001010K00