



Operating Guide


ASV-PV / DN 15-50 (4th gen.)

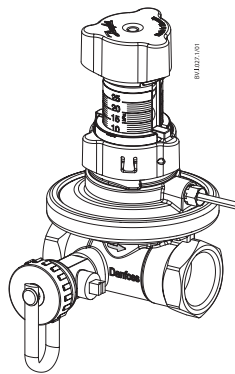




DN 15-25

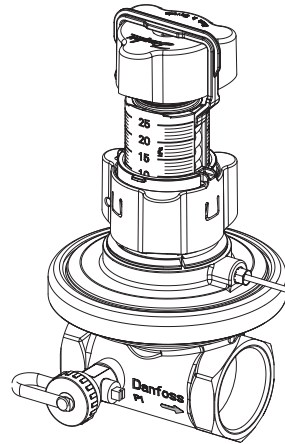

DN 32-50



Installation / Monterig / Einbau / Installation / Installatie / Installation / Asennus / Montaż / Uzstādišana / Beépítés / MONTAJ / Монтаж / Instalace / 安装 / Vgradnja / Instalación / Montavimas

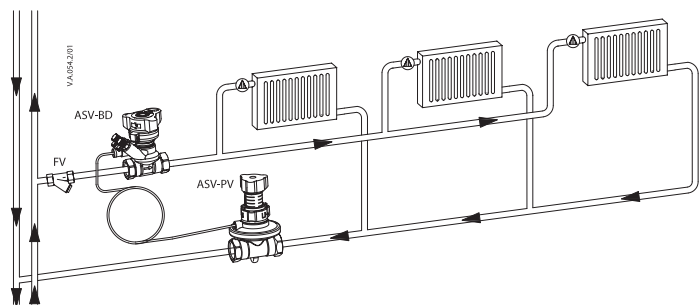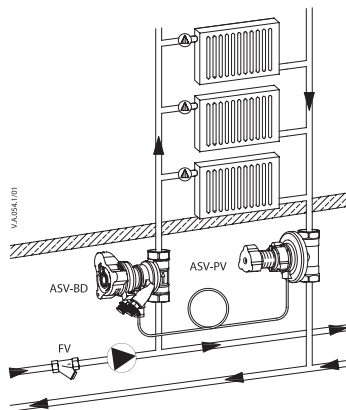

0 ... 120 °C





PN 16



$\Delta p_{max} = 150 \text{ kPa}$

DN	H min.	Int. thread ISO 7/1	Ext. thread ISO 228/1
15	80	Rp 1/2	G3/4 A
20	80	Rp 3/4	G1 A
25	100	Rp 1	G1 1/4 A
32	150	Rp 1 1/4	G1 1/2 A
40	150	Rp 1 1/2	G1 3/4 A
50	150	Rp 2	G2 1/4 A

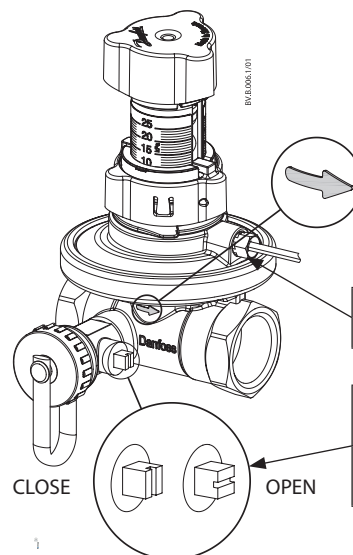


	5-8 Nm	☐
	8 mm	☐


	5 mm	☐
	3.5 - 4.5 mm x 0.7 mm	☐

ASV-PV / DN 15-50 (4th gen.)

Shut off / Afspærring / Absperung / Fermeture / Afsluiten / Avstängning / Sulkuventtiili / Funkcja odcięcia / Aizvēršana / Elzárás / КАРМА / Отключение / Uzavření / 关闭 / Zapiranje pretoka / Corte / Uždarymas

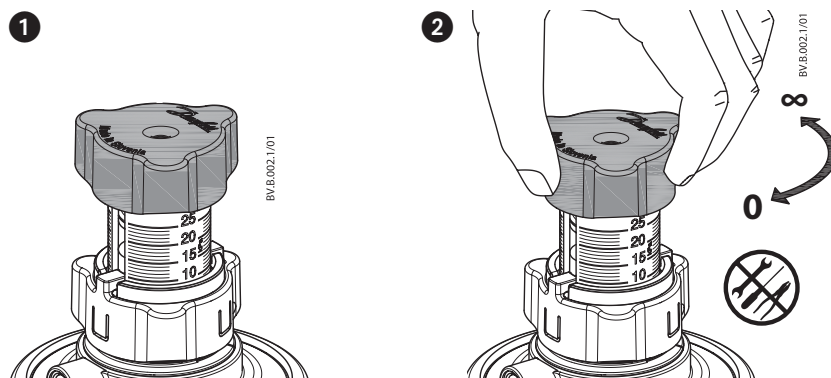

Setting / Indstilling / Einstellung / Réglage / Instelling / Inställning / Asettelu / Wykonywanie nastawy / Iestādījumi / Beállítás / AYARLAMA / Настройка / Nastavení / 设定 / Nastavitev / Ajuste / Nustatymas

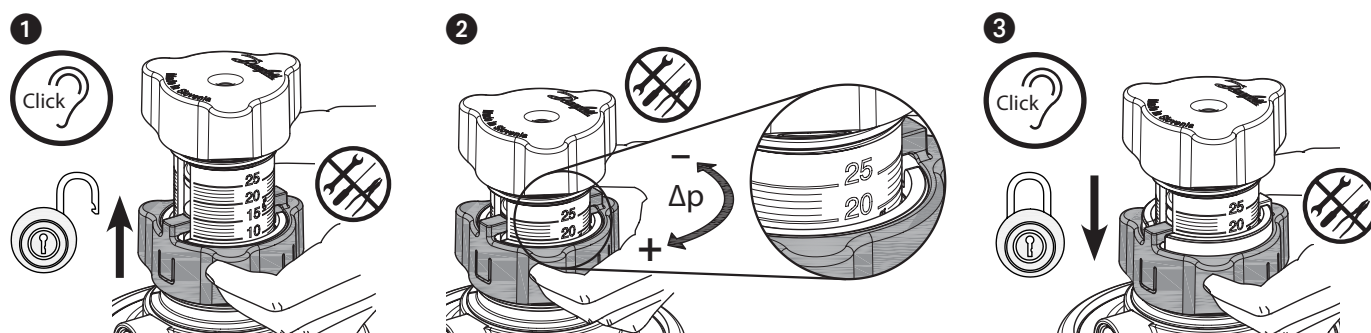

Flushing / Skyllning / Spülen / Rinçage / Spoelen / Spolning / Huuhtelu / Płukanie / Piesarkums / Öblítés / Kızarma / Промывка / Proplachování / 清洗 / Inyección / Plovimo

