

Acryl Ducting Seal

How to order

Acryl Ducting Seal is available in 310 ml cartridges, packed per 12 in a box. To order your specific Acryl Ducting Seal, please find below the article and EAN codes:

Colour:	Article code:	EAN code:
Silver Grey	12001748	8711595163859

Fungi and microorganisms according ISO 846

EN ISO 846 is a test of plastic materials, to determine and evaluate the effect of fungi and bacteria on polymeric materials. The ISO 846 test uses visual examination along with the measurement of mass and physical properties changes. The ISO 846 is a norm to test both fungi and bacteria in relation to plastics and polymers, important because microorganism actions can impact the quality of plastic products.

The ISO 846 procedure is a 28 day test to approach the real conditions of temperature and humidity for plastics products use.



From left to right: Aspergillus Niger, Penicillium Funiculosum, Chaetomium Globosum, Trichoderma virens, Paecilomyces varioti.



Centre of Excellence

Better results through Knowledge

Den Braven 's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!



Den Braven



Acryl Ducting Seal

Sealant for heating, ventilation and air conditioning applications


denbraven.com

BETTER RESULTS THROUGH KNOWLEDGE

Acryl Ducting Seal

Sealant for heating, ventilation and air conditioning applications

- Tested and approved according
- DIN ISO 846 A & C
- Specific for sealing HVAC
- Paintable with water based and synthetic paints
- Perfect adhesion
- Nearly non smelling
- Non corrosive towards metals

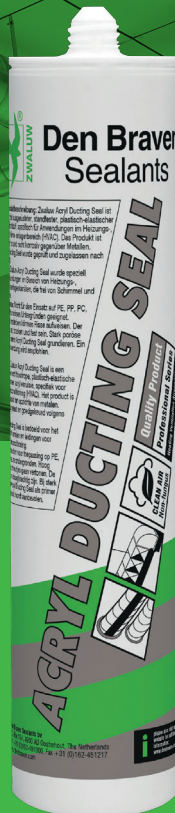

Acryl Ducting Seal

Product Descriptions

Zwaluw Acryl Ducting Seal is a plasto-elastic sealant based on acrylic dispersion, specific for the heating, ventilation and air conditioning applications. Acryl Ducting Seal has been tested according the DIN EN ISO 846 A & C.

Applications

Acryl Ducting Seal has been especially developed for sealing all heating, ventilation and air conditioning ducting applications.



Acryl Ducting Seal

Certifications

ILHOI-BM 08/1-16

Technical Performances

Density	1,63 g/ml
Shore-A hardness	32°
Elongation at break	250%
Tensile strength	0,40 Mpa
Skin formation	7 minutes

Visit our website to download the full technical specifications of the Acryl Ducting Seal.



Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the product page of the original Acryl Ducting Seal:

