




ARMAFLEX ULTIMA

INSTALL SAFETY

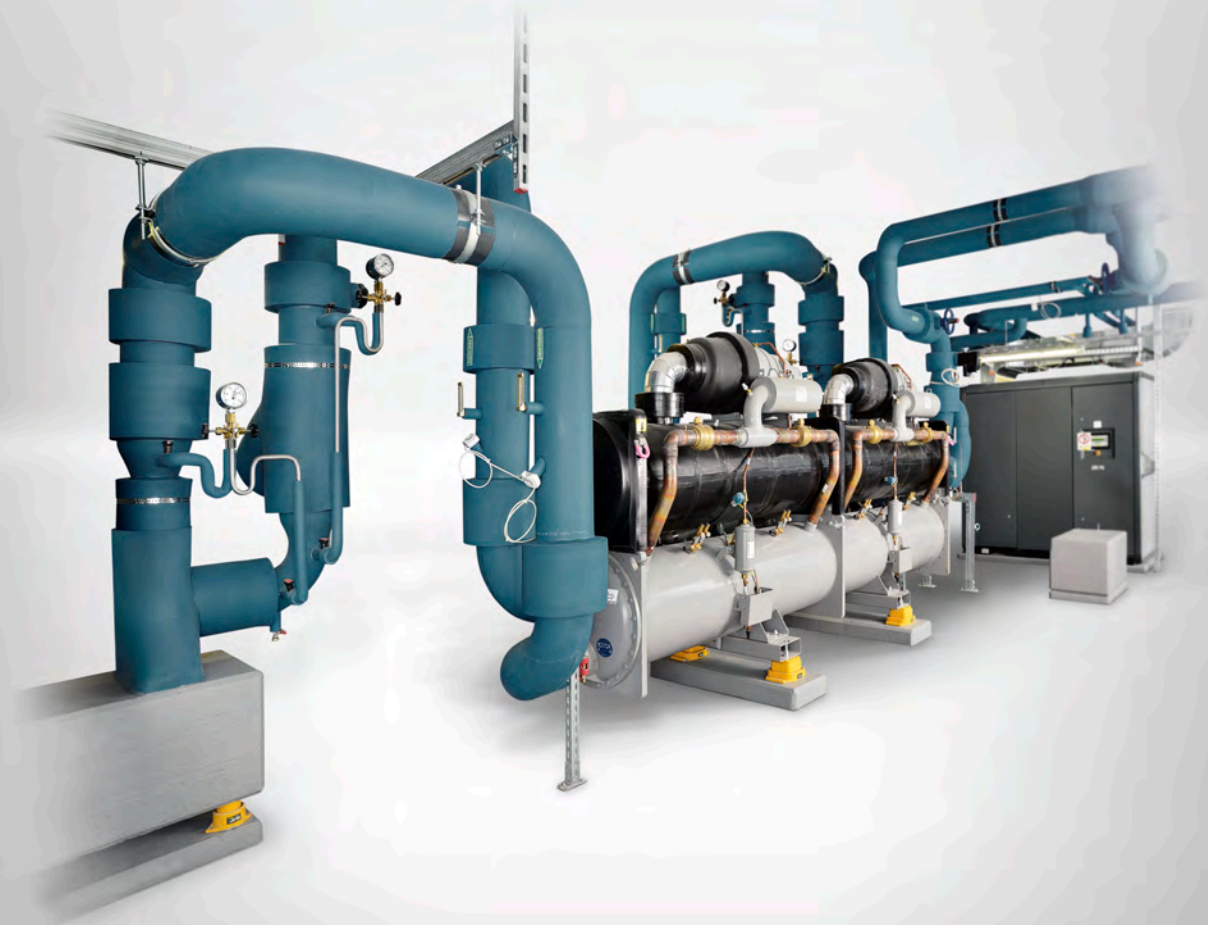

- Low smoke emissions in a fire
- Meets the requirements for sustainable construction
- Complete system integration with adhesives and pipe support



ARMAFLEX ULTIMA

With Armaflex Ultima Armacell has set a new safety standard in technical insulation. Based on the patented Armaprene technology, Armaflex Ultima is the first flexible technical insulation material in the world with fire class B_L-s1, d0.

- Tubes with an insulation thickness of 32 mm
- Sheets with an insulation thickness of 32 mm
- Armaflex SF Cleaner

European
patent

No. 2 261 305

PATENTED



SOLVENT-FREE ACCESSORIES FOR A SUSTAINABLE INSULATION SYSTEM

Besides Armaflex Ultima 700 adhesive, Armacell provides a solvent-free product. **Armaflex Ultima SF990** meets the higher requirements of green building schemes regarding environmental and health aspects of the building products used. A completely new addition to the range of accessories is a solvent-free cleaner: the **Armaflex SF cleaner** can be used to clean soiled surfaces of technical installations and also the surface of insulation materials. The cleaner is supplied in a practical spray bottle so that it can be applied sparingly and precisely.



1 - NEW SAFETY STANDARD IN TECHNICAL INSULATION

ARMAFLEX ULTIMA

95 % of fire fatalities occur due to smoke inhalation. In a fire, low smoke density can be a matter of life or death for those trapped. With the innovative Armaprene technology Armacell has been able to resolve the conflict of objectives between high flame resistance and minimal smoke development. Armaflex Ultima is the only elastomeric product in the market to achieve the fire class B_L-s1, d0. In comparison to a standard product, the flame-resistant insulation material exhibits 10 times less smoke development.



2 - THE FUTURE BELONGS TO SUSTAINABLE CONSTRUCTION

Today Armacell is the only manufacturer of flexible technical insulation materials to publish environmental product declarations based on an independent life cycle assessment (LCA). Environmental product declarations (EPDs) provide a transparent, independent and reproducible analysis of the environmental impacts of construction products and give detailed information with sound data and figures. As a "sustainability passport" EPDs form the basis for designing green buildings in accordance with certification schemes such as LEED, BREEAM, HQE or DGNB.

3 - JÜRGEN SAALFELD, INSULATOR, SCHMENGLER DÄMMTECHNIK GMBH, GERMANY

"We used Armaflex Ultima for the first time on cold installations in Yara's German distribution centre. In a fire, Armaflex Ultima develops 10 times less smoke than traditional flexible insulation materials, making it the safest insulation product for cold applications. The new material is slightly darker than the first Ultima generation. The foam is very flexible, but it is firmer than other rubber insulation materials and keeps its shape very well. The product can be cut and glued very easily and neatly."

Technical Data - Armaflex Ultima

Brief description	Flexible elastomeric foam on the basis of patented synthetic rubber composition with improved fire retardant properties, low smoke generation and a closed-cell material structure. For use in HVAC, refrigeration and process equipment applications.
Material type	Elastomeric foam based rubber; Manufactured with Armaprene® Patented Technology US Patent no. 8,163,811, EU patent no. 2 261 305. Factory made flexible elastomeric foam (FEF) according to EN 14304.
Colour	dark blue
Material Special Information	Self-adhesive coating: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil. Traces of silicon can be found on the protection paper/foil used to protect self-adhesive closures.
Applications	Insulation / protection of pipes, air ducts, vessels (incl. elbows, fittings, flanges etc.) to prevent condensation and save energy. Self-adhesive tubes shall additionally be secured by applying Armaflex Ultima Tape.
Special Features	Low smoke performance
Safety and Environment	Meets the requirements for sustainable construction in combination with Armaflex Ultima SF990 adhesive such as LEED. Type III Environmental Product Declaration (EPD): Declaration number "EPD-ARM-20150109-IBB1-DE", Institut Bauen und Umwelt e.V. (IBU)
Remarks	Declaration of Performance is available in accordance with Article 7(3) of Regulation (EU) No 305/2011 on our homepage: www.armacell.com/DoP

Property	Value/Assessment			Test ¹	Special Remark
Temperature Range					
Temperature Range	max. service temperature	+110 °C	(+ 85 °C if sheet or tape is glued to the object with its whole surface.)	EU 5846	Tested acc. to EN 14706 EN 14707 and EN 14304
	min. service temperature ¹	-50 °C (-200 °C)			
Thermal Conductivity					
Thermal Conductivity	ϑ_m	±0 °C	$\lambda =$	EU 5846	Declared acc. to EN ISO 13787 Tested acc. to EN 12667 EN ISO 8497
	λ	≤ 0,040	W/(m · K)		
Water vapour diffusion resistance					
Water vapour diffusion resistance	μ	≥	7.000	EU 5846	Tested acc. to EN 12086 EN 13469
Fire performance					
Reaction to fire	Tubes, Tubes self-adhesive, open tubes (up to 300 min insulated \varnothing_a)		B _L -s1,d0	EU 5846	Classified acc. to EN 13501-1 Tested acc. to EN 13823 and EN ISO 11925-2
	Sheets, sheets self-adhesive		B-s2,d0		
	Tape		B-s1,d0		
Other Fire Class	Ship Building		low-flammable - 2010 FTP Code	D 5243 D 5555 EU 5954	Classified acc. to MED 96/98/EC MODULE D Tested acc. to IMO Resolution
Practical Fire Behaviour	Self-extinguishing, does not drip, does not spread flames; low smoke density				
Fire resistance of structural element			EI 30 - EI 120	EU 5846 EU 5584	Classified acc. to EN 13501-2 Tested acc. to EN 1366-3
Other	FM-approved up to 25 mm			D 5192	FM: Tested according to UBC26-3, Class No.4924
Other technical features					
Dimensions and tolerances	In accordance with EN 14304, table 1			EU 5846	Tested according to EN 822, EN 823 EN 13467
UV resistance ²	Protection against UV-radiation is necessary.			TB 142	
Storage & Shelf life	self-adhesive tubes, self-adhesive sheets, self-adhesive tape: 1 year, can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).				
Antimicrobial behaviour	No fungal growth observed Tested acc. to EN ISO 846 (VDI 6022)			EU 5961	

1. For temperatures below -50 °C please contact our Customer Service Center to request for the corresponding technical information.

2. If Armaflex is applied under UV-radiation the material must be protected within 3 days with a covering.

¹ Further documents such as test certificates, approvals and the like can be requested using the registration number given.

All data and technical information are based on results achieved under typical application conditions. Recipients of this information should, in their own interest and responsibility, clarify with us in due time whether or not the data and information apply to the intended application area. Installation instructions are available in our Armaflex installation manual. Please consult our Customer Service Center before insulating stainless steels. For some refrigerants the discharge temperature may exceed +110 °C, please consult our Customer Service Center for further information.

Armaflex Ultima tubes



Length 2,0 m, Color blue, B_L-s1,d0

Pipe max. Outside-Ø [mm]	9,0 mm insulation thickness		13,0 mm insulation thickness	
	Code	m/carton	Code	m/carton
6	-	-	UD-13X006	164
10	-	-	UD-13X010	140
12	UD-09X012 ●	192	UD-13X012	130
15	UD-09X015	180	UD-13X015	112
18	UD-09X018	150	UD-13X018	98
22	UD-09X022	124	UD-13X022	88
28	UD-09X028	96	UD-13X028	64
35	UD-09X035	70	UD-13X035	56
42	UD-09X042	56	UD-13X042	48
48	UD-09X048	52	UD-13X048	40
54	UD-09X054	42	UD-13X054	36
60	UD-09X060	40	UD-13X060	28
64	UD-09X064 ●	28	UD-13X064 ●	26
76	UD-09X076	32	UD-13X076	24
89	UD-09X089	24	UD-13X089	18

Pipe max. Outside-Ø [mm]	19,0 mm insulation thickness		25,0 mm insulation thickness	
	Code	m/carton	Code	m/carton
10	UD-19X010	92	-	-
12	UD-19X012	84	-	-
15	UD-19X015	64	-	-
18	UD-19X018	58	UD-25X018	46
22	UD-19X022	56	UD-25X022	36
28	UD-19X028	40	UD-25X028	36
35	UD-19X035	40	UD-25X035	28
42	UD-19X042	24	UD-25X042	24
48	UD-19X048	24	UD-25X048	20
54	UD-19X054	24	UD-25X054	18
60	UD-19X060	16	UD-25X060	18
64	UD-19X064	16	UD-25X064	16
76	UD-19X076	16	UD-25X076	12
89	UD-19X089	16	UD-25X089	12

Pipe max. Outside-Ø [mm]	32,0 mm insulation thickness			
	Code	m/carton		
15	UD-32X015 ●	32	-	-
18	UD-32X018 ●	32	-	-
20	UD-32X020 ●	24	-	-
22	UD-32X022 ●	24	-	-
28	UD-32X028 ●	24	-	-
35	UD-32X035 ●	18	-	-
42	UD-32X042	16	-	-
48	UD-32X048	12	-	-
54	UD-32X054	12	-	-
60	UD-32X060	10	-	-
64	UD-32X064 ●	10	-	-
76	UD-32X076	10	-	-
89	UD-32X089	8	-	-

Length tolerance for tubes

± 1,5 %

Thickness tolerance

9 mm, 13 mm : ±1,5 mm
19 mm, 25 mm, 32 mm : ±2,5 mm

Remark

Up to 10% of the carton contents can also be delivered with tubes in 1 m length.
For carton contents below 20 m a single 2 m tube can be replaced by two 1 m tubes.

- Item not in stock. Delivery on request. [MTO]

Armaflex Ultima open tubes

Color blue, Open tube: for pipe diameter from 89 to 300 mm including insulation - B_L-s1,d0

Code	Insulation thickness [mm]	m ² /carton
UD-09X300 ●	9,0	10
UD-13X300	13,0	8
UD-19X300	19,0	5
UD-25X300	25,0	4
UD-32X300 ●	32,0	3

Thickness tolerance

9 mm - 19 mm : ±1,5 mm
25 mm - 32 mm : ±2,0 mm

● Item not in stock. Delivery on request. [MTO]

Armaflex Ultima tubes self-adhesive



Length 2,0 m, Color blue, B_L-s1,d0

Pipe max. Outside-Ø [mm]	9,0 mm insulation thickness		13,0 mm insulation thickness	
	Code	m/carton	Code	m/carton
15	UD-09X015-A ●	180	UD-13X015-A ●	112
18	UD-09X018-A ●	150	UD-13X018-A ●	98
22	UD-09X022-A ●	124	UD-13X022-A ●	88
28	UD-09X028-A ●	96	UD-13X028-A ●	64
35	UD-09X035-A ●	70	UD-13X035-A ●	56
42	UD-09X042-A ●	56	UD-13X042-A ●	48
48	UD-09X048-A ●	52	UD-13X048-A ●	40
54	UD-09X054-A ●	42	UD-13X054-A ●	36
60	UD-09X060-A ●	40	UD-13X060-A ●	28
76	UD-09X076-A ●	32	UD-13X076-A ●	24
89	UD-09X089-A ●	24	UD-13X089-A ●	18

Pipe max. Outside-Ø [mm]	19,0 mm insulation thickness		25,0 mm insulation thickness	
	Code	m/carton	Code	m/carton
15	UD-19X015-A ●	64	-	-
18	UD-19X018-A ●	58	UD-25X018-A ●	46
22	UD-19X022-A ●	56	UD-25X022-A ●	36
28	UD-19X028-A ●	40	UD-25X028-A ●	36
35	UD-19X035-A ●	40	UD-25X035-A ●	28
42	UD-19X042-A ●	24	UD-25X042-A ●	24
48	UD-19X048-A ●	24	UD-25X048-A ●	20
54	UD-19X054-A ●	24	UD-25X054-A ●	18
60	UD-19X060-A ●	16	UD-25X060-A ●	18
76	UD-19X076-A ●	16	UD-25X076-A ●	12
89	UD-19X089-A ●	16	UD-25X089-A ●	12

Length tolerance for tubes

± 1,5 %

Thickness tolerance

9 mm, 13 mm : ±1,5 mm
19 mm, 25 mm : ±2,5 mm

● Item not in stock. Delivery on request. [MTO]

Armaflex Ultima sheets endless



Width 1,0 m, Color blue, B-s2,d0

Code	Insulation thickness [mm]	Roll length [m]	m ² /carton
UD-06-99/E	6,0	15	15
UD-09-99/E	9,0	10	10
UD-13-99/E	13,0	8	8
UD-19-99/E	19,0	5	5
UD-25-99/E	25,0	4	4
UD-32-99/E •	32,0	3	3

Length tolerance for sheets	±1,5 %
Thickness tolerance for sheets	6 mm : ±1,0 mm
	9 mm - 19 mm : ±1,5 mm
	25 mm - 32 mm : ±2,0 mm

• Item not in stock. Delivery on request. [MTO]

Armaflex Ultima sheets endless self-adhesive



Width 1,0 m, Color blue, B-s2,d0

Code	Insulation thickness [mm]	Roll length [m]	m ² /carton
UD-06-99/EA	6,0	15	15
UD-09-99/EA	9,0	10	10
UD-13-99/EA	13,0	8	8
UD-19-99/EA	19,0	5	5
UD-25-99/EA	25,0	4	4
UD-32-99/EA •	32,0	3	3

Length tolerance for sheets	±1,5 %
Thickness tolerance for sheets	6 mm : ±1,0 mm
	9 mm - 19 mm : ±1,5 mm
	25 mm - 32 mm : ±2,0 mm

• Item not in stock. Delivery on request. [MTO]

Armaflex Ultima tapes self-adhesive



Color blue, B-s1,d0

Code	Width [mm]	Length [m]	Thickness [mm]	Rolls/carton
UD-TAPE	50,0	15	3	12

Armaflex Ultima adhesive



Code	Article description	Pieces/carton
AHU-700/1,0	Armaflex Ultima Adhesive 700, 1 liter cans	12
AHU-SF990/0,8	Armaflex Ultima Adhesive SF990, 0,8 liter cans	12

Armaflex Ultima cleaner



Code	Article description	Pieces/carton
SF-CLEANER/1,0	Solvent-free cleaner for use with Armaflex	6

