


Geberit Mapress Copper adapter with union nut

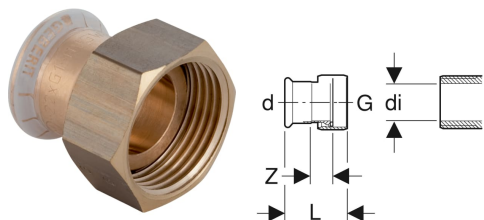

Example image

Application purposes

- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For remote network heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54\text{ mm}$
- Union nut made of brass
- Seal ring made of CIIR, black, up to $\varnothing \leq 54\text{ mm}$
- Seal ring made of EPDM, black, from $\varnothing > 54\text{ mm}$
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, \varnothing	G	di, \varnothing	L	Z
65081	10	12 mm	1/2 "	10 mm	3.2 cm	0.9 cm
65182	12	15 mm	1/2 "	10 mm	5.1 cm	2.5 cm
65082	12	15 mm	3/4 "	13 mm	3.7 cm	1.1 cm
65083	15	18 mm	3/4 "	13 mm	3.7 cm	1.1 cm
65040	15	18 mm	1 "	20 mm	3.9 cm	1.3 cm
65084	20	22 mm	1 "	20 mm	4 cm	1.1 cm
65044	20	22 mm	1 1/4 "	26 mm	4.3 cm	1.3 cm
65045	20	22 mm	1 1/2 "	32 mm	4.4 cm	1.3 cm
65046	25	28 mm	1 "	20 mm	4 cm	1.3 cm
65085	25	28 mm	1 1/4 "	26 mm	4.4 cm	1.3 cm
65050	25	28 mm	1 1/2 "	32 mm	4.6 cm	1.3 cm
65086	32	35 mm	1 1/2 "	32 mm	4.8 cm	1.3 cm
65051	32	35 mm	2 "	42 mm	4.8 cm	1.2 cm
65087	40	42 mm	1 3/4 "	39 mm	5.2 cm	1.3 cm
65052	40	42 mm	2 "	42 mm	5.4 cm	1.4 cm
65053	40	42 mm	2 1/4 "	42 mm	5.6 cm	1.4 cm
65088	50	54 mm	2 3/8 "	51 mm	5.8 cm	1.5 cm
65054	50	54 mm	2 1/2 "	54 mm	6.3 cm	1.4 cm